




Java Brew Collection


JBC 550



JBC 550 TOUCH15" + CABINET
STICKER KIT WITH "DESIGN YOUR BREAK" GRAPHIC (OPTIONAL)

JBC 550, THE PERFECT COFFEE IN ALL ITS FLAVOUR VARIATIONS

JBC 550, automatic vending machine with 250 cups capacity, available in espresso coffee from beans and instant coffee.

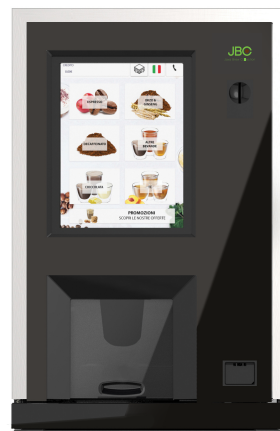

JBC 550 EASY

USER INTERFACE

▪ Great modularity with 3 interchangeable user interfaces:

Easy: standard membrane interface, with 20 large buttons.

Smart: touchscreen selection interface, with 20 wide backlit selections.

Touch: monitor 15" FULL HD with touchscreen technology able to play multimedia contents.

- Customizable sugar dosage.
- Wide 3.5" TFT LCD colour display (available only on the Easy and Smart versions).
- Compatible to use a mug instead of a disposable cup (optional mug kit).
- Enlightened cup station.
- Standard coin introduction.



Java Brew Collection



SENSOR
DETECTION CUP
(OPTIONAL)



MUG
SUPPORT
(OPTIONAL)



PATENTED
ESPRESSO
BREWER



VARIABLE
CHAMBER
COFFEE BREWER

SPECIFICATIONS

- ELECTRICAL SUPPLY
220-240 Vac - 50/60 Hz
- INTERNAL ELECTRICAL SUPPLY

All the electrical components are supplied at 24 Vdc, with the exception of the boiler resistances and the pump.

- POWER SUPPLY
1.80 kW single boiler espresso version
- WATER SUPPLY
Fitting connection = 3/4"
Water pressure = 0.5 – 6.5 bar

TECHNOLOGIES

- Version with traditional espresso brewer (ES): espresso coffee made in compliance with Italian tradition.
- Version with variable chamber coffee brewer (ESV): doses from 7 to 14 gr. Guarantees perfect coffee extraction in all flavour variations.

FEATURES

- Great configuration flexibility and wide choice of versions. Automatic with water system supply or with autonomous tank inside the base cabinet.
- Door lock with programmable code.
- Standard serpentine kit for tea.
- Cup dispenser adjustable to various diameters (from 70 to 71 mm) and dispenser for 90 or 105 mm stirrers.
- Standard boiler for Espresso: 1500 W – 150 cc.
- Liquid waste tray: 2.3 liters.
- Switching power supply that guarantees total stability of the instant product dose and complete electric safety protections.
- Standard multi-protocol electronics.

- Compatible with telemetry systems.

PAYMENT SYSTEM

- Compatible with all the payment systems available on the market.
- Machine designed for mounting an Exe or MDB change-giver coin mechanism and CASHLESS systems.

PRODUCT CAPACITY

Coffee beans hopper	1.70 kg (4.25 lt)
Single instant products canister	2.2 lt
Double instant products canister	4.5 lt
Stirrers 90-105mm	250 pcs.
Cups Ø 70-71	250 pcs.

ACCESSORIES


- Cabinet.
- Autonomous pump kit that can be assembled inside the cabinet.
- Cup sensor kit to use a reusable cup.
- Mug support kit.
- Kit chip clock.
- Coffee waste tray for 200 pods.
- Conversion kit for 80 diameter cups.
- Sticker kit with "Design your break" graphic.

ENVIRONMENT

- Compatible with paper cups and wooden stirrers and possibility to deliver the beverage in a reusable cup or mug.
- Energy saving mode to reduce the energy consumption when the machine is in stand by.
- In compliance with **ROHS** and **WEEE**.

JBC 550 MODELS	JBC 550 1ES-5 SB STD	JBC 550 1ESV-5 SB STD
USER INTERFACE	EASY / SMART / TOUCH15"	EASY
VERSION	COFFEE BEANS	COFFEE BEANS
TRADITIONAL ESPRESSO COFFEE BREWER (ES)	ES	-
VARIABLE CHAMBER COFFEE BREWER (ESV)	-	ESV
COFFEE BEANS HOPPERS	1	1
BOILERS	1	1
INSTANT PRODUCTS CANISTERS (OF WHICH 1 SUGAR)	5	5
DIMENSIONS MM	795H x 510W x 645D / WEIGHT 72 KG CABINET: 853H x 510W x 649D (without wall bracket). Depth including wall bracket 703 mm.	

1. Sugar 2. Decaffeinated 3. Tea
4. Coffee beans 5. Milk 6. Chocolate



COFFEE BEANS

(Valid configuration for version with traditional espresso brewer
+ version with variable chamber coffee brewer)